
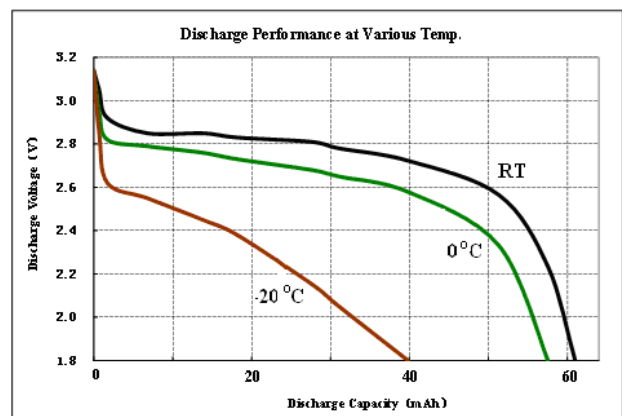


| | |
|--------------------------|---------------------------|
| Classification: | Thin battery |
| Cell Type: | Primary, non-rechargeable |
| Chemistry: | Lithium Manganese Dioxide |
| Model No.: | CP082922 |
| Nominal Voltage: | 3.0V |
| Nominal Capacity: | 50mAh@1mA to 1.8V@23°C |
| Operating Temperature: | -20°C to 60°C |
| Storage Temperature: | -40°C to 60°C |
| Year Self-discharge Rate | <2%(storage at 23±2°C) |
| Max Continuous | 20mA |
| Discharge Current: | |
| Max Pulse Discharge | 80mA |
| Current: | |
| Exterior/Housing: | Laminated aluminum foil |
| Weight: | 1.0g |
| Terminals/Connector: | Ni(-)/Ni(+) Tabs |
| Shelf Life: | 10 years |
| UL/UN Listed: | UN38.3 |

PERFORMANCE

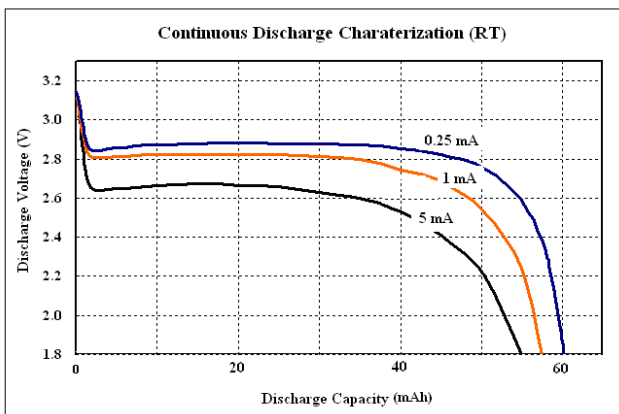

Note: Information in the document is just for reference, not for guarantee of product performance, the product quality is subject to the buyer and seller's final confirmation in the contract.