
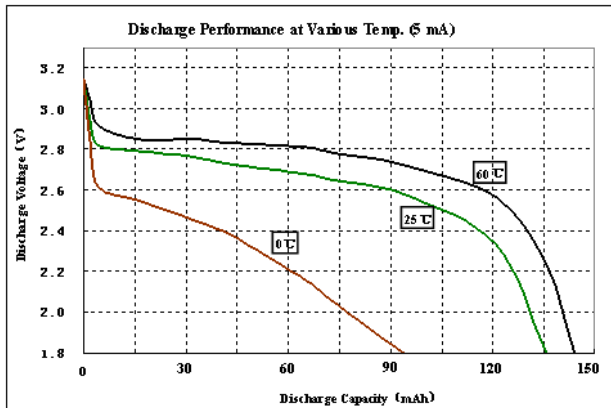


|                          |                           |
|--------------------------|---------------------------|
| Classification:          | Thin battery              |
| Cell Type:               | Primary, non-rechargeable |
| Chemistry:               | Lithium Manganese Dioxide |
| Model No.:               | CP201335                  |
| Nominal Voltage:         | 3.0V                      |
| Nominal Capacity:        | 120mAh@2mA to 1.8V@23°C   |
| Operating Temperature:   | -20°C to 60°C             |
| Storage Temperature:     | -40°C to 60°C             |
| Year Self-discharge Rate | <2%(storage at 23±2°C)    |
| Max Continuous           | 25mA                      |
| Discharge Current:       |                           |
| Max Pulse Discharge      | 50mA                      |
| Current:                 |                           |
| Exterior/Housing:        | Laminated aluminum foil   |
| Weight:                  | 1.5g                      |
| Terminals/Connector:     | Ni(-)/Ni(+) Tabs          |
| Shelf Life:              | 10 years                  |
| UL/UN Listed:            | UN38.3                    |

## PERFORMANCE

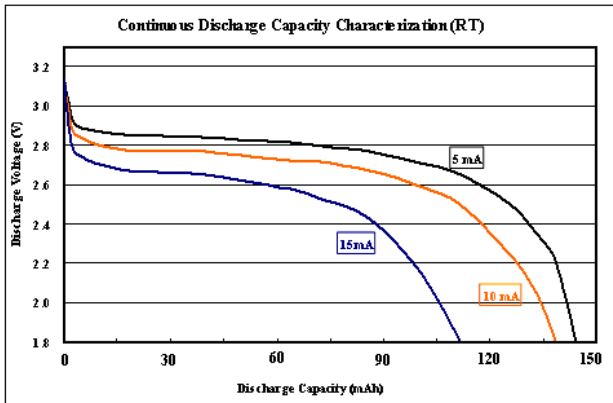

Note: Information in the document is just for reference, not for guarantee of product performance, the product quality is subject to the buyer and seller's final confirmation in the contract.