
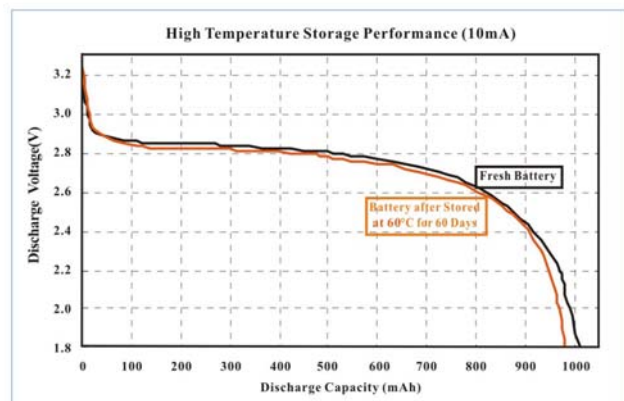
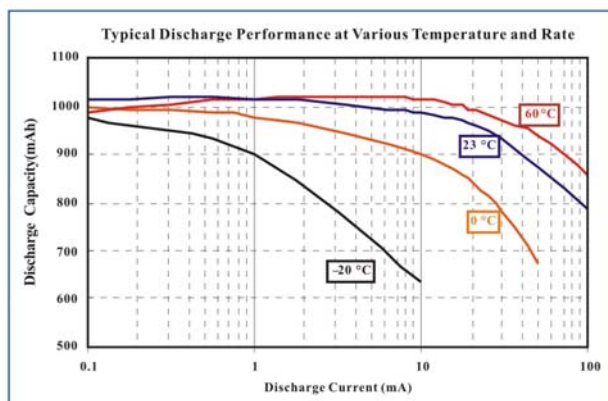
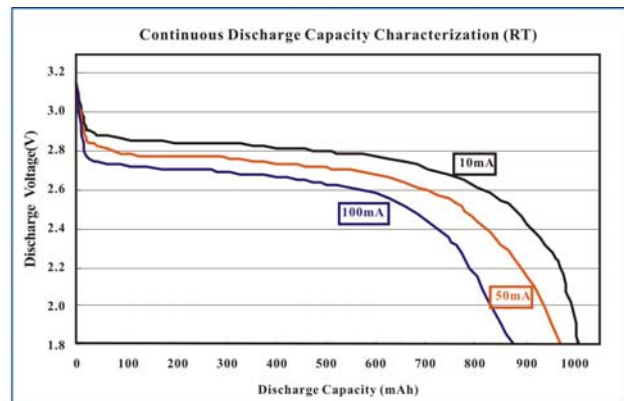


Classification:	Thin battery
Cell Type:	Primary, non-rechargeable
Chemistry:	Lithium Manganese Dioxide
Model No.:	CP224248
Nominal Voltage:	3.0V
Nominal Capacity:	1000mAh@10mA to 1.8V@23°C
Operating Temperature:	-20°C to 60°C
Storage Temperature:	-40°C to 60°C
Year Self-discharge Rate	<2%(storage at 23±2°C)
Max Continuous Current:	100mA
Discharge Current:	
Max Pulse Discharge Current:	200mA
Exterior/Housing:	Laminated aluminum foil
Weight:	8.0g
Terminals/Connector:	Ni(-)/Stainless steel(+) Tabs (Ni-Ni optional)
Shelf Life:	10 years
UL/UN Listed:	UN38.3

PERFORMANCE

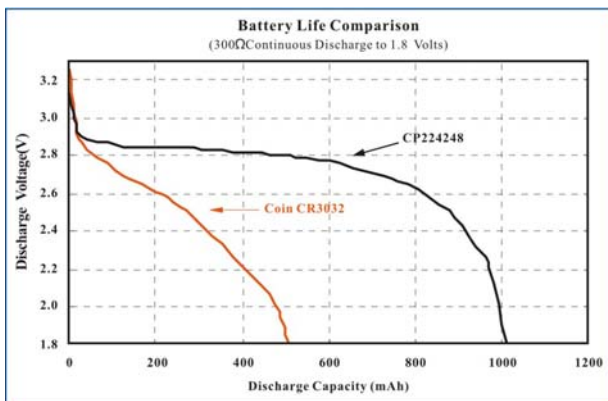

Note: Information in the document is just for reference, not for guarantee of product performance, the product quality is subject to the buyer and seller's final confirmation in the contract.

Shenzhen Ultrable New Energy Co., Ltd.

ADD: Room 901, Building B, Zhantao Technology Building, Minzhi Road, Longhua New Area, Shenzhen, China

P.C.: 518131 Tel: +86 (0)755 23320487 Fax: +86 (0)755 23356261

www.ultrablecell.com

info@ultrablecell.com