
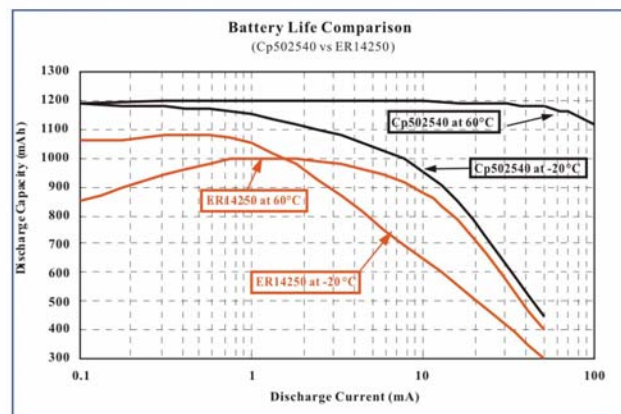
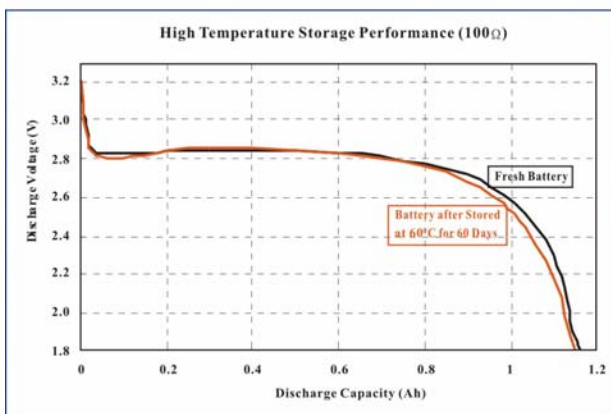
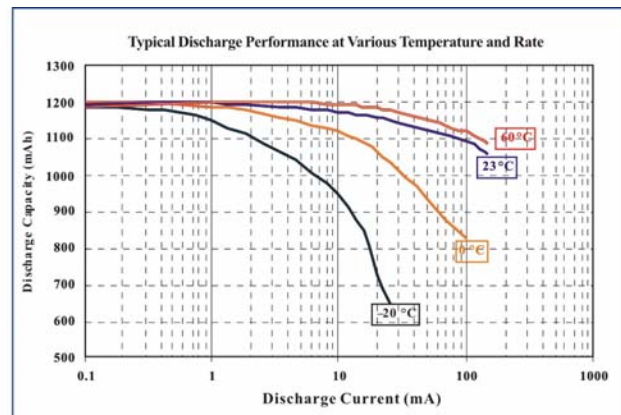


Classification:	Thin battery
Cell Type:	Primary, non-rechargeable
Chemistry:	Lithium Manganese Dioxide
Model No.:	CP502540
Nominal Voltage:	3.0V
Nominal Capacity:	1200mAh@10mA to 1.8V@23°C
Operating Temperature:	-20°C to 60°C
Storage Temperature:	-40°C to 60°C
Year Self-discharge Rate	<2%(storage at 23±2°C)
Max Continuous Current:	150mA
Discharge Current:	500mA
Max Pulse Discharge Current:	500mA
Exterior/Housing:	Laminated aluminum foil
Weight:	9.5g
Terminals/Connector:	Ni(-)/Stainless steel(+) Tabs (Ni-Ni optional)
Shelf Life:	10 years
UL/UN Listed:	UN38.3

PERFORMANCE

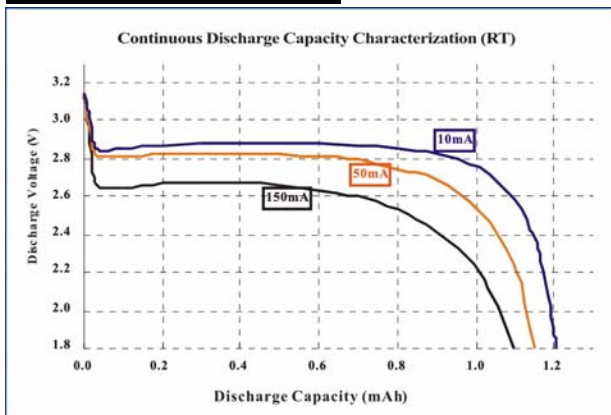

Note: Information in the document is just for reference, not for guarantee of product performance, the product quality is subject to the buyer and seller's final confirmation in the contract.